

McHale

PROGLIDE
R310

NON-COONITIONER
MOWER



WWW.MCHALE.NET

The Professional Choice

PRO GLIDE R310




MCHALE PRO GLIDE R310 NON-CONDITIONER MOWER

For over 30, years the McHale range of grassland equipment has been operating on 6 continents in some of the worlds most difficult conditions.

Building on their comprehensive range of mowers, McHale now introduce the McHale Pro Glide R310 non-conditioner mower.

Following direct requests from the market, McHale's design team have combined their specialist knowledge of crop harvesting, energy and technical know-how to develop the McHale Pro Glide R310 non-conditioner mower.

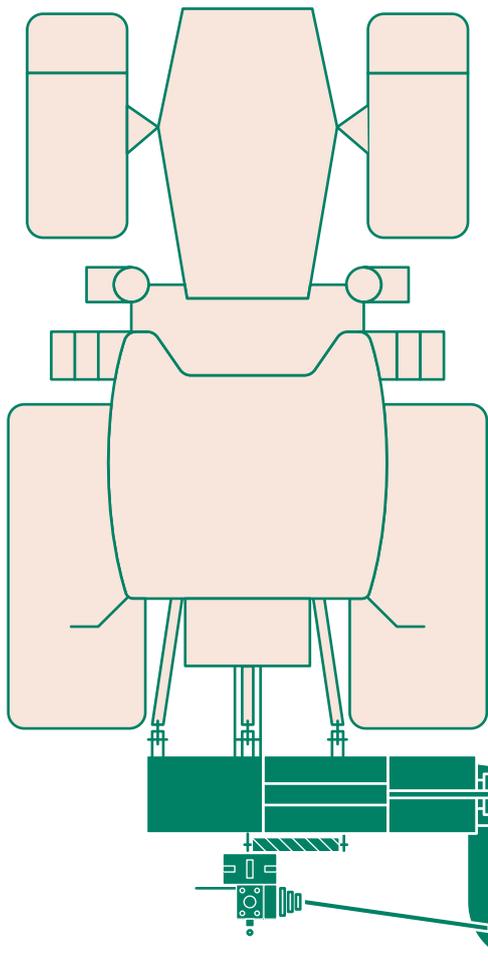


Transport Position

The mower folds vertically to 110° to reduce transport height and distribute the weight evenly across the tractor and provide the driver with a clear view from the rear view mirrors.

Working Position

For operation, the mower folds down into the floatation working position where the 3D ground tracking technology accompanies the 3m cutter bar to deliver a clean cut and uncontaminated swath.

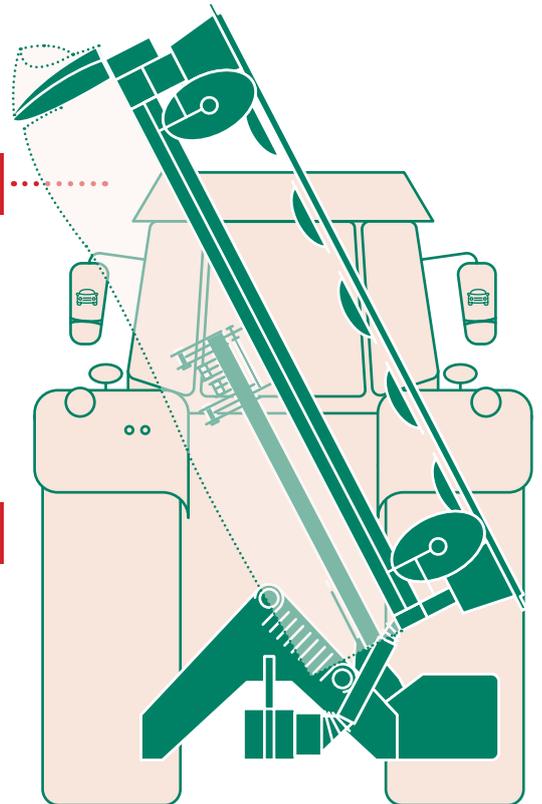

Standard Features:

3D Ground Tracking Technology	Unique Forward/Back Movement of 12°	Transverse Movement of 17°	Unique Stone Protection
Superior Cutting Performance	Mechanical Break Back Protection	Heavy-Duty, Fully Welded Cutter Bar	Heavy-Duty 1,000 or 540 rpm Driveline
Low Profile Front Edge	Quick Fit Blades	25mm (1") Thick Gears	Adjustable Swathing Discs (Optional)

3D GROUND TRACKING TECHNOLOGY

The McHale Pro Glide R310 mower has excellent ground following capabilities delivering superior floatation.

The mower is fitted with a patented ground adaptation technology which delivers 3-dimensional contour tracking of the ground. This allows the mower to **EASILY MOW ON ROUGH OR UNDULATING TERRAIN** and still deliver optimal results.

The McHale Pro Glide range of mowers offers a number of unique features which delivers:

- **3D Ground Tracking**
- **Unique Forward/Back Movement of 12°**
- **Transverse Movement of 17°**
- **Unique Stone Protection**
- **Superior Cutting Performance**

3-Dimensional Ground Contour Tracking

Most rear mowers have a central pin which allows the mower to move left and right to adjust to changes in ground condition. The McHale Pro Glide is different in that it is fitted with a patented 3D ground tracking suspension unit, which allows the mower to:


- **Move Left and Right**
- **Move Forward and Back**
- **Let the cutter bar move back and up if it collides with an obstacle.**

This ensures that the Pro Glide cutter bar delivers better cutting performance.

MOWER MOVEMENT


12° Forward/Back Movement

This movement ensure a precision floatation of the cutter bar for a cleaner cut in all ground conditions.

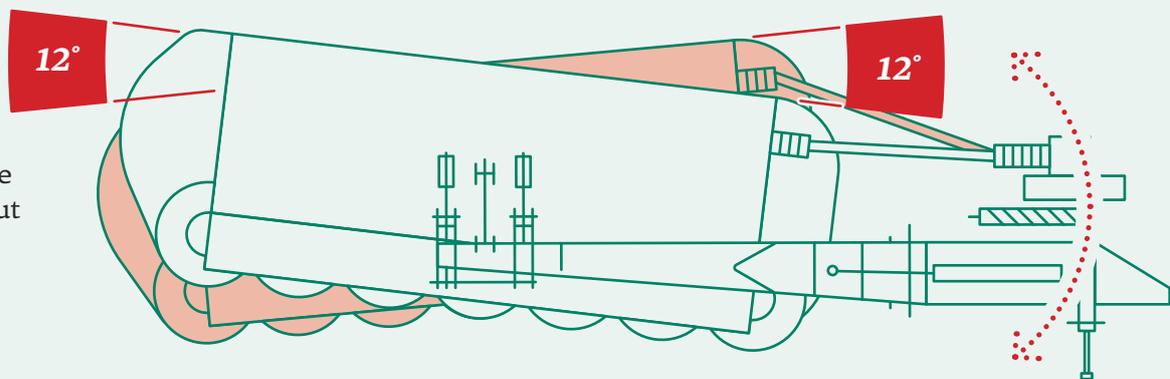

17° Right/Left Movement

The right/left transverse movement means the cutter bar maintains a clean cut as it smoothly glides over humps and hollows in the ground.

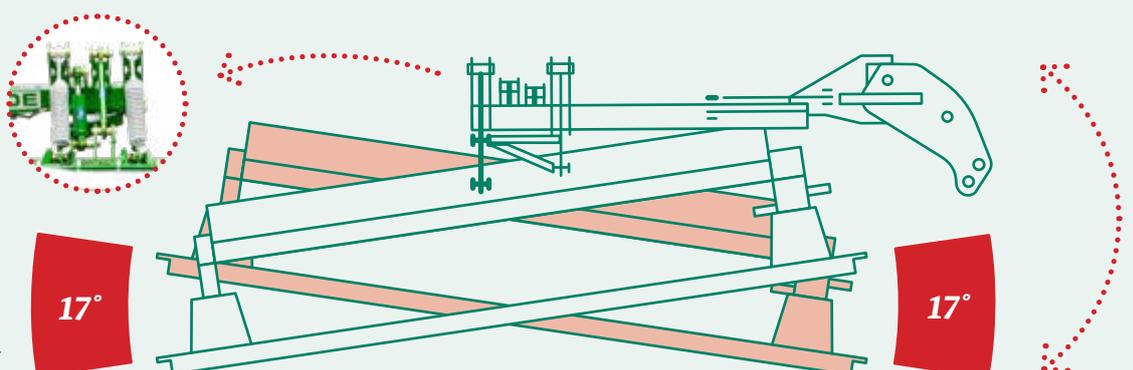



3D Ground Tracking

The patented ground adaptation technology saves time and maximises throughput as the main break back protection is not easily triggered by an obstacle. The rear suspension springs react instantly to ground contours, offering a high-quality cut, even when working at high ground speeds.



Cutter Bar Floatation

A large compensating spring provides excellent floatation across the full width of the Pro Glide R310 mower. Accompanied by McHale's renowned 3D Ground Tracking Technology, this easily adjusted pressure system delivers superior cutting performance in a quick and simple manner.



Mechanical Break-Back

If the mower hits an immovable object, the mechanical break back will be triggered. The break back will swing the machine backwards and over the obstacle before the spring-loaded design automatically returns the cutting unit to the original working position when clear of the obstacle.



110° Transport Position

For transportation, the mower folds vertically to position itself behind the centre point of the tractor for safe transport. The transport height of the machine is reduced as the mower bed is at 110° angle. This allows for the weight of the mower to be distributed across the tractor while also providing the driver with a clear view from their rear-view mirrors.

OPTIONAL EXTRAS

Rear Lighting Kit



Adjustable Swathing Discs



CUTTER BAR FEATURES

The McHale Pro Glide R310 is equipped with an extremely strong, fully welded cutter bar that houses 7 discs, which deliver a **CUTTING WIDTH OF OVER 3 METRES**. The cutter bar possesses a number of features which include:



1 Gearboxes

Heavy-duty gearboxes directly power the cutter bar. Compared to using belts, which can slip in heavy crop, direct drives **ensure even and continuous distribution of power** across the gears in the cutter bar.

2 Low-Profile Front Edge

The cutter bar has been designed so the rounded, low-profile front edge lets the **fully welded cutter bar** glide smoothly over the ground.

3 Tight Cut, Quick Change

The quick-change mower blades make it **easy to change or replace worn or damaged blades**. The blades overlap very close to the surface of the cutter bar to self-clean when working.

4 Drive Gears

In the cutter bar, large, heavy-duty, 25mm (1") thick drive gears **transfer the power to auxiliary gears** which power the individual discs.

5 Mowing Discs

The 7 mowing discs on the cutter bar are specifically designed to maximise crop flow. All mowing discs are equipped with two blades that are **angled at 10° to ensure a clean & even cut**, leaving an uncontaminated swath.

6 Shear Protection

Each mowing disc has its own **individual protective safety mechanism**. If a collision occurs, the mechanism will shear the key in order to protect the drive.



TECHNICAL TABLE

PROGLIDE R310

DIMENSIONS & WEIGHT

Transport Width	1.9m (75")
Transport Length	1.5m (59")
Transport Height	3.7m (146")
Weight	1,015kg (2,238lbs)

MOWER SPECIFICATIONS

Cutting Width	3m (118")
Swathing Width	1.6m – 2.3m (63"–91")
Number of Cutting Discs	7
Total Number of Blades	14 (2 blades per disc)
Cutting Height	25mm – 75mm (1"–3")
Cutting Disc Speed	3,200 rpm
Cutting Blade	Quick change (Double sided)
Adjustable Swathing Discs	Optional

TRACTOR ATTACHMENT

Minimum Power Requirement	80 kW / 108 HP
Linkage Attachment	CAT II or CAT III (Rear) 3-Point Linkage
PTO Speed (Interchangeable Gearbox)	540 / 1,000 rpm
Rear Lighting Kit (Optional)	LED Lighting: 12 V / 7- Pin Socket
Hydraulic Systems	Double Acting Hydraulic Supply with Float (Minimum)
Minimum Pressure	180 bar (2,610psi)
Minimum Hydraulic Flow Rate	20 l/min (4.54 gal/min) @ 180 bar (2,610psi)
Capacity	3.5 ha/h (8.5 acres/hour)





M-Hale

Ballinrobe,
Co. Mayo,
Ireland
F31 K138

T. 353 (0) 94 95 20300
F. 353 (0) 94 95 20356
E. sales@mchale.net

WWW.MCHALE.NET

Distributed by:

DISCLAIMER: This literature is designed for worldwide circulation. Due to a continuing policy of product improvement, we reserve the right to alter specifications and constructions without notice. As machines are exported to many different countries, general information, pictures and descriptions are provided; these should be taken as approximate and may include optional equipment that is not part of the standard specification. Please consult your local dealer or distributor for further information.